


# N4.65

## SPECIFICATIONS

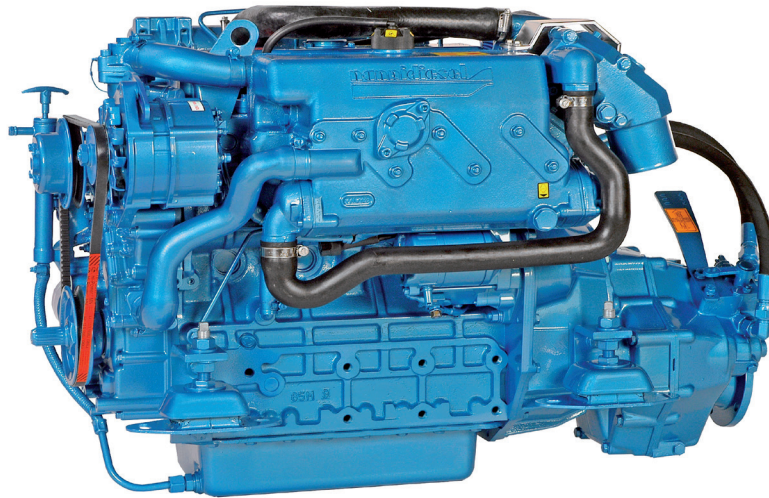

Power at crankshaft	43.4 kW [59 hp]	Engine base	Kubota
Displacement	2.434 l [148.5 in <sup>3</sup> ]	Fuel system	Mechanical Indirect injection
Configuration	4 cylinders in line	Air intake	Turbocharged
Operation type	4 strokes Diesel	Cooling	Closed cooling with heat exchanger
Bore & Stroke	87 x 102.4 mm [3.43 x 4.03 in]	Max mounting angle	15° Front down 15° Front up
Compression ratio	23 : 1	Alternator	12 Volt 120 Amp
Rated speed	2700 rpm	Rating	M4
Idling speed	850 rpm	Emission compliance	IMO Annex VI Compliant RCD2013/53/EU BSO2
Peak torque	168 Nm	Dry weight with TM345A	248 kg [546.75 lbs]
Peak torque speed	1800 rpm		

# N4.65

43.4 kW [59 hp] at 2700 rpm

## TECHNICAL DESCRIPTION

### ENGINE BLOCK

- 4 Cylinders in line
- 2 Valves per cylinder
- Gear driven valve train
- Watercooled exhaust manifold

### FUEL SYSTEM

- Indirect E-TVCS injection system
- Fuel filter

### LUBRICATION SYSTEM

- Replaceable full-flow oil filter
- Oil dipstick

### COOLING SYSTEM

- Closed cooling with heat exchanger
- Gear driven self-priming raw water pump
- Coolant circulating pump
- Water cooled exhaust elbow

### ELECTRICAL SYSTEM & INSTRUMENTATION

- 12V / 120A alternator
- 12V electrical system
- Complete instrumentation including key switch and alarms
- Extension cable harness with plug-and-play

### AIR INTAKE

- Turbocharged

### OTHER FEATURES

- Flexible engine mounts
- Internal balancers
- Single side serviceability

### OPTIONAL EQUIPMENTS & ACCESSORIES

- Keel cooling adaptation
- Dry exhaust elbow
- Complete marine propulsion systems
- Marine transmission adaptation kits
- Throttle and shift controls
- Additional instrumentation, Flying bridge extension harness
- Rigid engine mounting
- Power take off

### RATINGS


- Up to 3000 annual operating hours
- Load factor up to 40%
- Full power for no more than 1 hour out of each 12 hours of operation. The remaining time must be at, or below cruising speed

### TRANSMISSIONS


- Shaft line
- Sail Drive
- Contact your Nanni representative for more details and availability about transmissions types and models range.

## PERFORMANCE CURVES


### POWER AT CRANKSHAFT

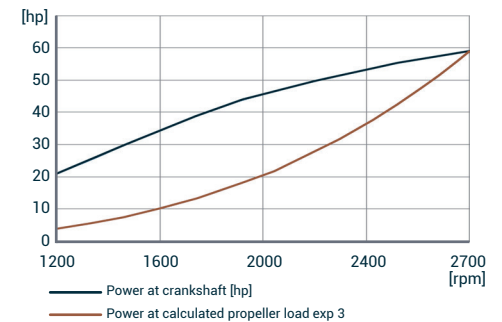


### TORQUE AT CRANKSHAFT

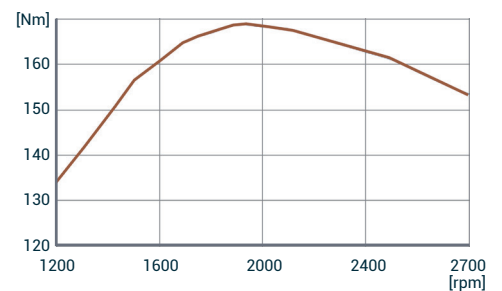

### FUEL CONSUMPTION

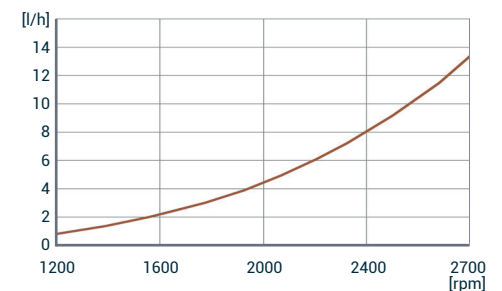

## DIMENSIONS WITH TM345A

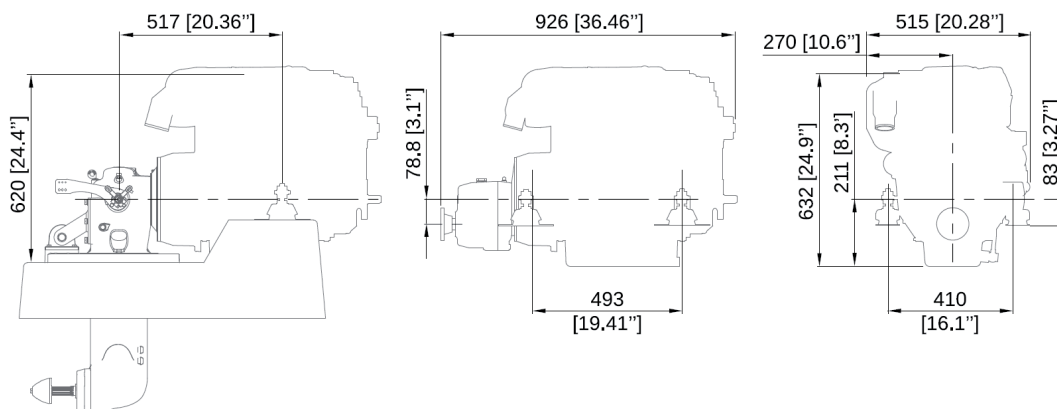

## NANNI INDUSTRIES S.A.S.

11, Avenue Mariotte - Zone Industrielle  
33260 La Teste - France  
Tel: +33 (0)5 56 22 30 60  
Fax: +33 (0)5 56 22 30 79

Technical data according to ISO 8665. This document is not contractual. Nanni reserves the right to modify any of the characteristics stated in this document without notice, in a constant effort to improve the quality of its products. Images and illustrations may show non standard equipments. All combination of equipment & accessory are not available.

DGBXXC01008